

Working for a Better Tomorrow

BBJ Scaffolding Pipes



BS EN 39



BBJ Scaffolding Pipe are manufactured in accordance with BS EN 39:2001. These pipes are easy to assemble and are manufactured from premium quality raw material. These pipes are light weight and have high tensile strength.

Application & Uses

BBJ Scaffolding Pipe have high tensile strength and are widely demanded for various scaffolding applications.

Product Range

The lengths can be provided in cut to length also as per customer demand. The full length pipe can be made upto 7.3152 meters. The BBJ Scaffolding Pipes are available in 48.3mm diameter as per customer requirement.

Product Features

- Durability and high tensile strength
- Availability of cut-to-length sizes as per requirement

Raw Material Specifications

BBJ Scaffolding Pipes are manufactured from premium quality raw material in accordance with the international quality standards

- BS EN 39:2001

Features of BBJ Scaffolding Pipes

- Long-term cost savings
- Greater load carrying capability
- Fewer couplers, standards, ledgers & transoms required


Testing Compliance & Standards

- Flattening test
- Straightness
- Thickness
- Weight
- Length



Product Specification (BS EN 39)

Type	Nominal Dia		Outer Dia (mm)		Wall Thickness	Standard Pipe Weight	No. of Meter per Ton	No. of Pipes per Bundle
	mm	Inch	Minimum	Maximum	mm	Kg/m	M/Ton	Number
2	48.3	1 ½"	47.8	48.8	2.9	3.24	309	61
3	48.3	1 ½"	47.8	48.8	3.2	3.56	281	61
4	48.3	1 ½"	47.8	48.8	4.0	4.37	229	61

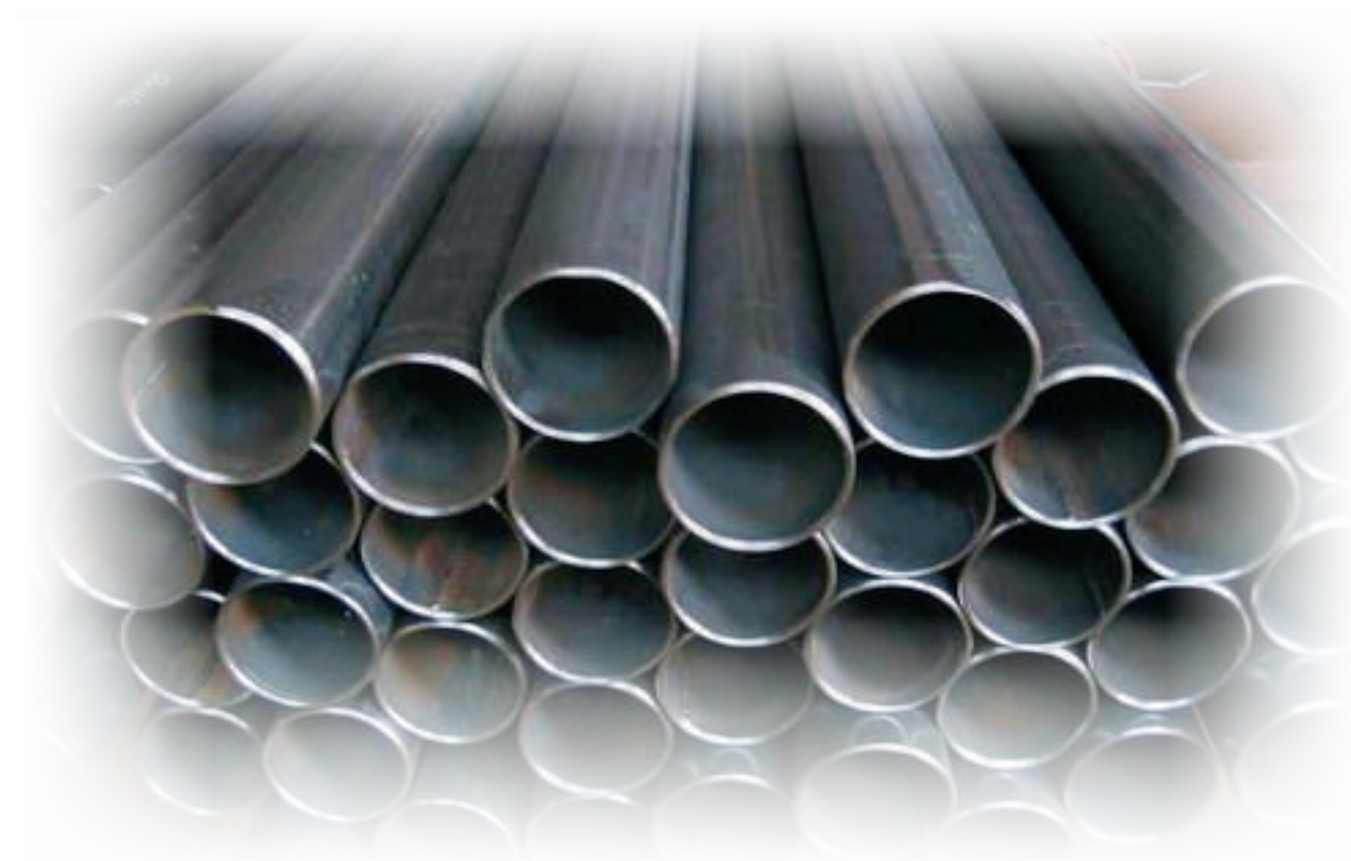

BBJ PIPE INDUSTRIES LIMITED

Head Office
BBJ House, 40 Abbot Road, Lahore
Tel : +92 42 36317302 - 06
Fax: +92 42 36309443
Email: sales@bbj.com.pk
www.bbj.com.pk

Regional Office
House # 1, Airport Villas,
Airport Road,
Islamabad.
Tel : +92 51 5706058
E-mail : sales.isb@bbj.com.pk

Shop & Ware House
92-Railway Road,
Lahore
Tel : +92 42 37658770
E-mail : shop@bbj.com.pk